

GL 60 S

SENSOR-SWITCHED LED OUTDOOR LIGHT

neva
lux

EAN 4007841007881

E-Nr. 924370079

- Floor and path luminaire with motion detector with high-quality stainless steel base and opal glass
- Perfect complement to the L 260 S outdoor light
- Automatic light thanks to 360 ° Infrared sensor with up to 12 m detection of movement
- Functions: adjustable basic light, pleasant soft light start, 4 hours continuous light
- Incl. E27 LED bulb with warm white light (3000 K) with 781 lm at 9,78 W
- Incl. mounting accessories - plastic-free packaging

● steinel



GL 60 S

SENSOR-SWITCHED LED OUTDOOR LIGHT

EAN 4007841007881

E-Nr. 924370079

Technical Data

ELECTRICAL	
Mains connection	230 – 240 V / 50 Hz
Power	9,78 W
SENSOR TECHNOLOGY	
Sensor technology	passive infrared
With motion detector	Yes
Detection angle	360 °
Opening angle	30 °
Sneak-under protection	Yes
Segment-by-segment masking	Yes
Electronic scalability	No
Mechanical scalability	No
Radial range	Ø 12 m (113 m²)
Tangential range	Ø 24 m (452 m²)
CONNECTIVITY	
Networking	No
Slave mode adjustable	No
LIGHTING TECHNOLOGY	
Measured luminous flux 360°	781 lm
Efficiency	79,9 lm/W

Colour temperature	3000 K
LED colour deviation	SDCM6
Colour rendering index	80-89
With illuminant	Yes
Illuminant	LED can be replaced
Base	E27
LED cooling system	Passive Thermo Control
Soft light start	Yes
Continuous light	selectable, 4h
LIFETIME	
LED lifetime max. °C	25000 h
LED lifetime L70B50 25°C	> 20000 h
SETTINGS	
Twilight switch	Yes
Twilight setting	2 – 2000 lx
Time setting	5 s – 15 Min.
Base light function	Yes
Settings via	Potentiometers
With remote control	No
Base light function in percent	10 – 50 %
Base light function percent from	10 %

HOUSING & MATERIAL	
Impact resistance	IK03
Protection class (IP)	IP44
Protection class	II
Ambient temperature	from -20 up to 50 °C
Housing material	Stainless steel
Cover material	Glass opal
Cover material (scope of delivery)	shrouds
Mounting location	Stand mounted
Application location	Outdoors
Mounting type	Surface wiring
Application room	all round the building courtyard & driveway garden outdoors terrace / balcony
Colour	Silver
SCOPE OF DELIVERY & WARRANTY	
Manufacturer warranty	3 years
House number sheet included	No
CERTIFICATES & EPREL	
EPREL category	Surrounded product with separate light source (e.g. E27)

GL 60 S


SENSOR-SWITCHED LED OUTDOOR LIGHT

EAN 4007841007881

E-Nr. 924370079

Illustrations

TECHNICAL DRAWINGS

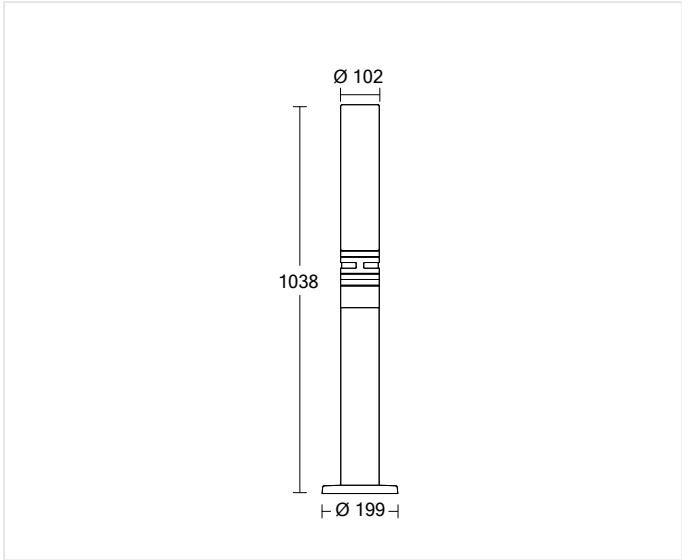

GL 60 S


SENSOR-SWITCHED LED OUTDOOR LIGHT

EAN 4007841007881

E-Nr. 924370079

Wiring Diagrams

WIRING DIAGRAM 1



Circuit diagram

GL 60 S

SENSOR-SWITCHED LED OUTDOOR LIGHT

EAN 4007841007881

E-Nr. 924370079


Highlights



4-hour manual override (optional)



Including innovative LED lamp

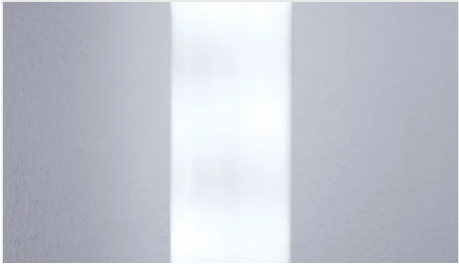

Optional basic lighting level 0 - 50 %



High-quality stainless steel



High-quality opal glass shade

GL 60 S

SENSOR-SWITCHED LED OUTDOOR LIGHT

EAN 4007841007881
E-Nr. 924370079

Accessories

ARTICLE NUMBER	DESCRIPTION	CATEGORY
 4007841008321	LED Leuchtstab GL 60 S	Accessory
 4007841001346	Ersatzglas für GL 60 S	Spare Part
 4007841001339	Ersatz-Elektronikeinheit GL 60 S	Spare Part

ORDERING INFORMATION

Art.-Nr.

007881

EAN

4007841007881

E-Number

924370079

Typ

GL 60 S

nevalux

nevalux AG
Neugrütstrasse 2
8610 Uster
+41 44 508 78 78
info@nevalux.swiss