

XLED home 2 S white

SENSOR-SWITCHED LED FLOODLIGHT

neva
lux

EAN 4007841033088

E-Num. 924700189

- Spotlight with motion detector and fully swivelling LED panel in noble opal look
- Never change bulbs again thanks to 50,000 hours LED life (approx. 30 years at 4.5 hours/day)
- Automatic light thanks to 180 ° Infrared sensor with up to 10 m detection of movement
- Optional corner wall bracket available for reliable and uninterrupted monitoring of an area in front of two house walls
- Warm white light (3000 K) and long-life 13,7 W LEDs with 1550 lm, with an illumination of max. 150 sqm, max. 4m mounting height
- Incl. mounting accessories - plastic-free packaging

● steinel

161 x 180 x 218 mm



XLED home 2 S white

SENSOR-SWITCHED LED FLOODLIGHT

EAN 4007841033088

E-Nr. 924700189

Technical Data

DIMENSIONS		LIGHTING TECHNOLOGY		Twilight setting teach		No
Dimensions L x W x H		Measured luminous flux 360°		HOUSING & MATERIAL		
161 x 180 x 218 mm		1550 lm		Impact resistance		IK03
ELECTRICAL		Colour temperature		Protection class (IP)		IP44
Mains connection		3000 K		Protection class		II
220 – 240 V / 50 – 60 Hz		LED colour deviation		Ambient temperature		from -20 up to 40 °C
Power		SDCM3		Housing material		HCMC
13,7 W		Colour rendering index		Cover material		Plastic, opal
SENSOR TECHNOLOGY		With illuminant		Mounting location		corner wall
Max. mounting height		Yes, STEINEL LED system		Application location		Outdoors
Sensor technology		Illuminant		Mounting type		Surface wiring
passive infrared		LED cannot be replaced		Application room		all round the building courtyard & driveway outdoors terrace / balcony
With motion detector		Base		Colour		white
Yes		LED cooling system		SCOPE OF DELIVERY & WARRANTY		
Detection angle		HCMC (High Conductive Magnesium Composite)		Manufacturer warranty		5 years
180 °		Soft light start		Corner wall bracket included		No
35 °		LIFETIME		CERTIFICATES & EPREL		
Sneak-under protection		LED lifetime max. °C		EPREL energy efficiency class		E
Yes		LED lifetime L70B50 25°C		EPREL category		Light source
Segment-by-segment masking		> 60000 h				
Yes		Luminous flux decline per LM80				
Electronic scalability		L70B10				
No		SETTINGS				
Mechanical scalability		Twilight switch				
No		Twilight setting				
Radial range		Yes				
r = 5 m (39 m²)		Time setting				
Tangential range		8 s – 35 Min.				
r = 10 m (157 m²)		Base light function				
Mounting height		No				
1,80 – 4,00 m		Main light adjustable				
Optimal mounting height		No				
2 m		Settings via				
CONNECTIVITY		Potentiometers				
Networking						
No						


XLED home 2 S white

SENSOR-SWITCHED LED FLOODLIGHT

EAN 4007841033088
E-Nr. 924700189

Illustrations

TECHNICAL DRAWINGS

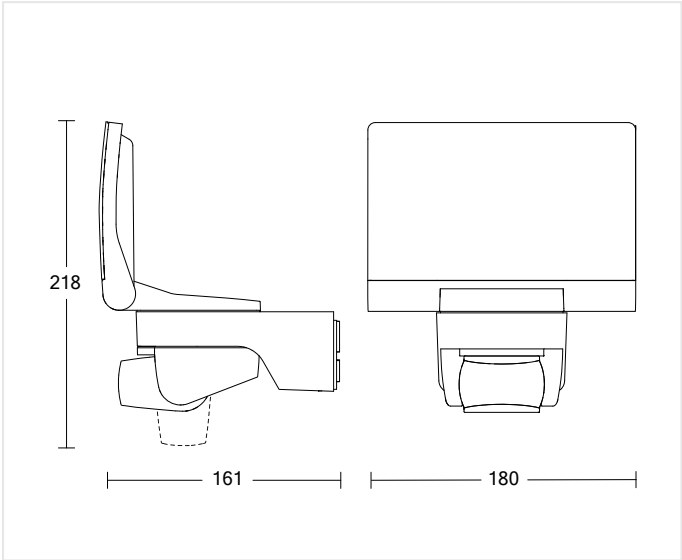


161 x 180 x 218 mm

MOUNTING HEIGHT

1,80 – 4,00 m BEREICH	2 m OPTIMAL	4,00 m MAX
--------------------------	----------------	---------------

Wiring Diagrams

WIRING DIAGRAM 1

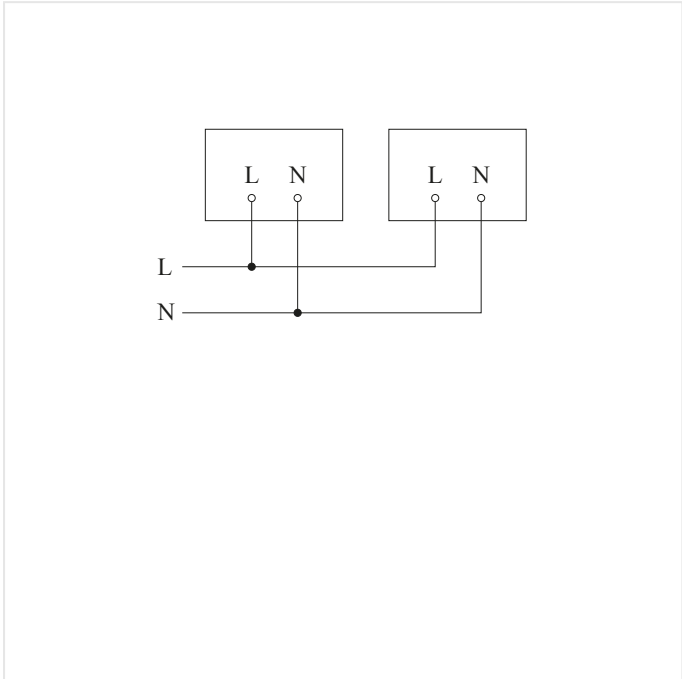

Circuit diagram


XLED home 2 S white

SENSOR-SWITCHED LED FLOODLIGHT

EAN 4007841033088

E-Nr. 924700189


Highlights

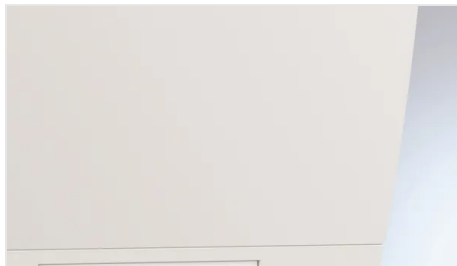

Including STEINEL LED system



HCMC cooling system

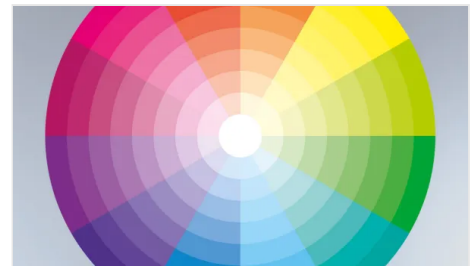

Colour rendering index Ra ≥ 80

XLED home 2 S white

SENSOR-SWITCHED LED FLOODLIGHT

EAN 4007841033088
E-Nr. 924700189

Accessories

ARTICLE NUMBER	DESCRIPTION	CATEGORY
 4007841055615	Eckwandhalter XLED Home 2/ Protect/ Pro 240/ PRO Expanse weiss	Accessory
 4007841053086	Eckwandhalter XLED Home 2/ Protect/ Pro 240/ PRO Expanse graphit	Accessory
 4007841055875	Eckwandhalter XLED Home 2/ Protect/ Pro 240 schwarz	Accessory
 4007841053109	Eckwandhalter XLED Home 2/ Protect/ Pro 240/ PRO Expanse silber	Accessory

ORDERING INFORMATION

Art.-Nr.

033088

EAN

4007841033088

E-Number

924700189

Typ

XLED home 2 S white

neva

lux

nevalux AG

Neugrütstrasse 2

8610 Uster

+41 44 508 78 78

info@nevalux.swiss