

IR Quattro MICRO 6m COM1 - white

PRESENCE DETECTOR

neva
lux

EAN 4007841053789

E-Nr. 535933800

 **steinel**

43 x 75 mm



IR Quattro MICRO 6m COM1 - white

PRESENCE DETECTOR

EAN 4007841053789

E-Nr. 535933800

Technical Data

IDENTIFICATION		Sensor technology		passive infrared		Time setting		5 s – 60 Min.	
Version	Presence detector	With motion detector			Yes	Base light function	No		
DIMENSIONS		Detection angle			360 °	Main light adjustable	No		
Dimensions Ø × H	43 x 75 mm	Opening angle			90 °	Functions	Normal / test mode Semi-/fully automatic Manual ON / ON-OFF		
ELECTRICAL		Sneak-under protection			Yes	Settings via	Remote control Smart Remote		
Mains connection	220 – 240 V / 50 – 60 Hz	Segment-by-segment masking			No	With remote control	No		
Power	1000 W	Electronic scalability			No	Twilight setting teach	Yes		
Switching output 1 resistive	1000 W	Mechanical scalability			No	HOUSING & MATERIAL			
Fluorescent lamps ECG	500 W	Radial range			4 x 4 m (16 m²)	Protection class (IP)	IP65		
Fluorescent lamps uncompensated	400 VA	Tangential range			6 x 6 m (36 m²)	Ambient temperature	from -25 up to 55 °C		
Fluorescent lamps series-compensated	400 VA	Switching zones			168 switching zones	Housing material	Plastic		
Fluorescent lamps parallel-compensated	400 VA	Mounting height			2,50 – 4,00 m	Cover material	without cover		
Switching output 1 low-voltage halogen lamps	1000 VA	Presence range			4 x 4 m (16 m²)	Mounting location	ceiling		
LED lamps < 2 W	100 W	Optimal mounting height			2,8 m	Application location	Indoors		
LED lamps > 2 W < 8 W	300 W	CONNECTIVITY		Networking		Mounting type	In-ceiling installation		
LED lamps > 8 W	600 W	Type of networking			Master/master Master/slave	Material	Plastic		
Capacitive load in µF	176 µF	Networking via			Cable	Application room	Indoors WC / washroom care room function room / ancillary room hotel room one-person office		
Own consumption	0,5 W	LIGHTING TECHNOLOGY		Soft light start		Colour	white		
Switching output 1 number of LED/fluorescent lamps	8 pcs.	Continuous light			selectable	RAL colour	9003		
Switching output 1 potential-free	No	Constant light regulation			No	SCOPE OF DELIVERY & WARRANTY			
SENSOR TECHNOLOGY		SETTINGS		Twilight switch		Manufacturer warranty	5 years		
Max. mounting height	4,00 m			Twilight setting		Corner wall bracket included	No		

IR Quattro MICRO 6m COM1 - white


PRESENCE DETECTOR

EAN 4007841053789

E-Nr. 535933800

Illustrations

TECHNICAL DRAWINGS

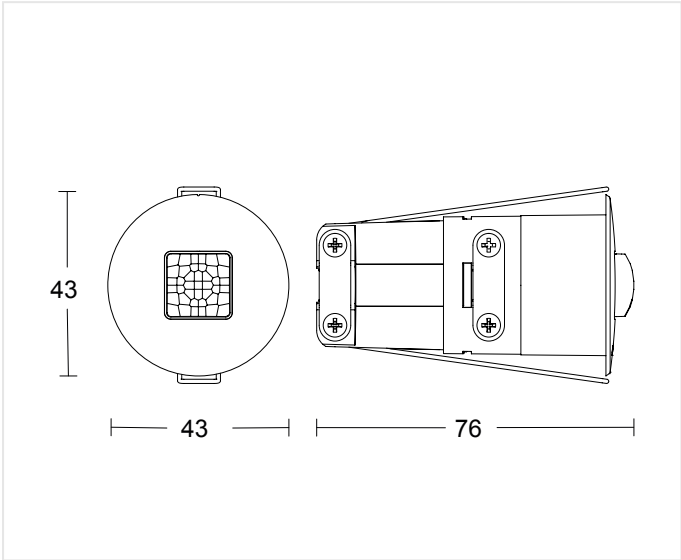

43 x 75 mm

MOUNTING HEIGHT

2,50 – 4,00 m BEREICH	2,8 m OPTIMAL	4,00 m MAX
--------------------------	------------------	---------------

IR Quattro MICRO 6m COM1 - white


PRESENCE DETECTOR

EAN 4007841053789

E-Nr. 535933800


Wiring Diagrams

WIRING DIAGRAM 1

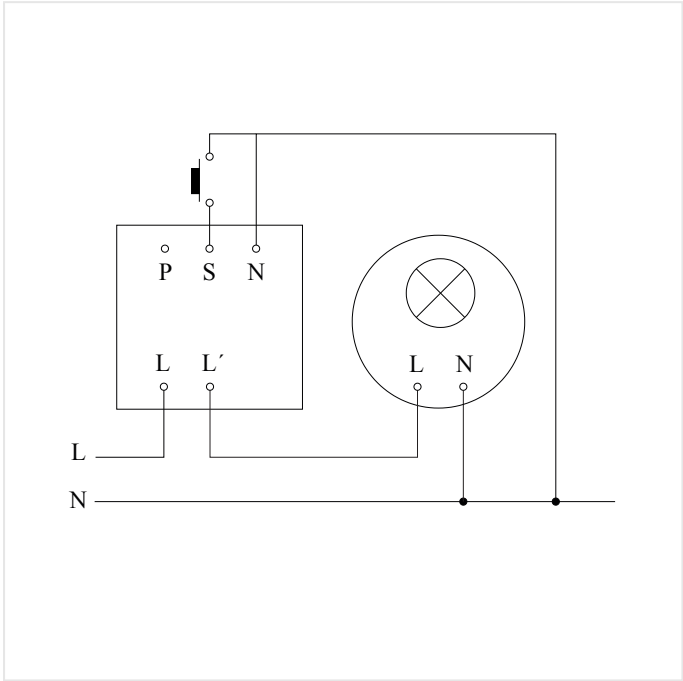

Master circuit diagram

WIRING DIAGRAM 2

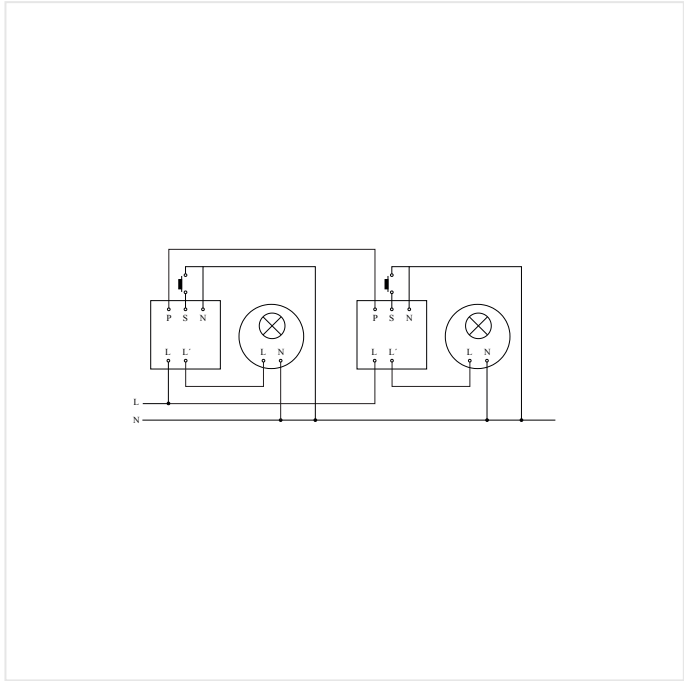

Master/master interconnection circuit diagram

IR Quattro MICRO 6m COM1 - white

PRESENCE DETECTOR

EAN 4007841053789

E-Nr. 535933800

Highlights



Miniature precision infrared lens



With spring clips



Can only be set using optional remote controls

IR Quattro MICRO 6m COM1 - white

PRESENCE DETECTOR

EAN 4007841053789
E-Nr. 535933800

Accessories

ARTICLE NUMBER	DESCRIPTION	CATEGORY
 4007841009151	Smart Remote	Accessory
 4007841592806	Nutzer Fernbedienung RC5	Accessory
 4007841559410	Service Fernbedienung RC8	Accessory

ORDERING INFORMATION

Art.-Nr.

053789

EAN

4007841053789

E-Number

535933800

Typ

IR Quattro MICRO 6m COM1 - white

neva

lux

nevalux AG

Neugrütstrasse 2

8610 Uster

+41 44 508 78 78

info@nevalux.swiss