

IR Micro Office 6m DALI-2 APC - concealed

neva
lux

PRESENCE DETECTOR

EAN 4007841067151

E-Nr. 535900035

- Perfectly suited for small rooms such as individual offices
- Light management, e.g. constant light control, light scenes, semi- / full automatic control
- Broadcast control of up to 20 dimmable DALI luminaires
- Cover caps for detection limitation simply snap into place included
- Commissioning and setting via STEINEL Connect app

 **steinel**

85 x 37 mm



IR Micro Office 6m DALI-2 APC - concealed

PRESENCE DETECTOR

EAN 4007841067151

E-Nr. 535900035

Technical Data

IDENTIFICATION	
Version	Presence detector
DIMENSIONS	
Dimensions Ø x H	85 x 37 mm
ELECTRICAL	
Mains connection	220 – 240 V / 50 – 60 Hz
Control output DALI	Broadcast 1x20 electronic ballasts
SENSOR TECHNOLOGY	
Max. mounting height	5,00 m
Sensor technology	passive infrared
With motion detector	Yes
Detection angle	360 °
Opening angle	90 °
Sneak-under protection	Yes
Segment-by-segment masking	Yes
Electronic scalability	No
Mechanical scalability	Yes
Radial range	4 x 4 m (16 m²)
Tangential range	6 x 6 m (36 m²)
Switching zones	168 switching zones
Mounting height	2 – 5 m
Presence range	4 x 4 m (16 m²)
Optimal mounting height	2,8 m
CONNECTIVITY	
Networking	Yes
Networking via	Bluetooth Mesh
Number of DALI participants	20
With bus coupler	No
LIGHTING TECHNOLOGY	
Soft light start	Yes
Continuous light	selectable
Constant light regulation	Yes
SETTINGS	
Twilight switch	Yes
Twilight setting	2 – 1000 lx
Time setting	5 s – 60 Min.
Base light function	Yes
Base light function time	10s-60 min all night Brightness-controlled OFF
Main light adjustable	0 - 100 %
Functions	Semi-/fully automatic Lighting scenario Manual ON / ON-OFF Normal / test mode Neighbouring group function TouchDIM function Motions sensor Constant-lighting control Light sensor Adjustable fade time when switching on and off Constant-lighting control ON-OFF Presence function Presence detector logic
Settings via	Bluetooth
With remote control	No
Twilight setting teach	Yes
Base light function in percent	0 – 100 %
Base light function percent from	0 %
HOUSING & MATERIAL	
Protection class (IP)	IP20
Ambient temperature	from -25 up to 55 °C
Housing material	Plastic
Cover material	without cover
Cover material (scope of delivery)	shrouds
Mounting location	ceiling
Application location	Indoors
Mounting type	Concealed wiring
Material	Plastic
Application room	Indoors conference room / meeting room duty room function room / ancillary room kitchenette one-person office recreation room
Colour	white
RAL colour	9003
SCOPE OF DELIVERY & WARRANTY	
Manufacturer warranty	5 years
Corner wall bracket included	No
CERTIFICATES & EPREL	
Certificates	DALI-2

IR Micro Office 6m DALI-2 APC - concealed


PRESENCE DETECTOR

EAN 4007841067151

E-Nr. 535900035

Illustrations

TECHNICAL DRAWINGS

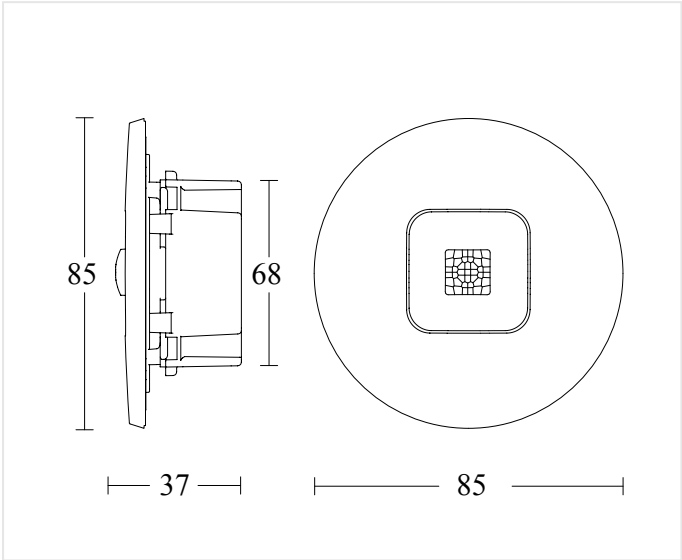

85 x 37 mm

MOUNTING HEIGHT

2 – 5 m BEREICH	2,8 m OPTIMAL	5,00 m MAX
---------------------------------------	-------------------------------------	----------------------------------

IR Micro Office 6m DALI-2 APC - concealed


PRESENCE DETECTOR

EAN 4007841067151

E-Nr. 535900035

Wiring Diagrams

WIRING DIAGRAM 1

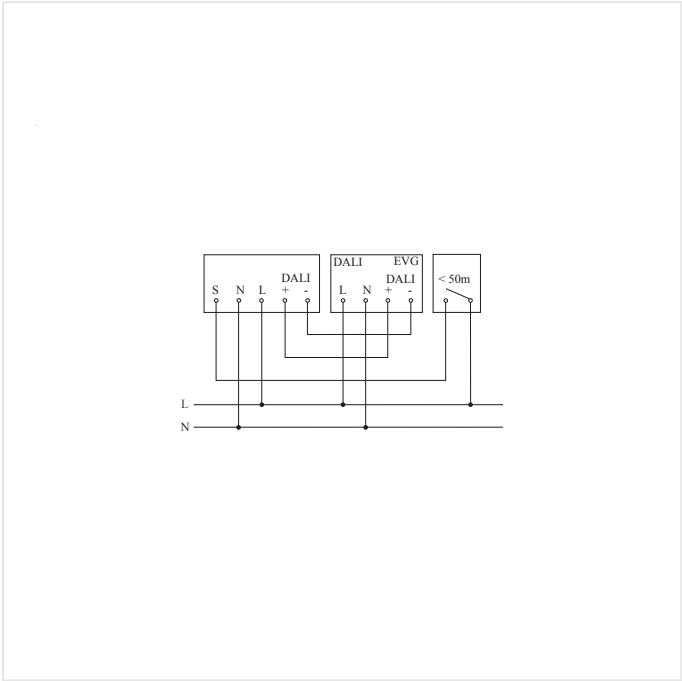

Circuit diagram

IR Micro Office 6m DALI-2 APC - concealed

PRESENCE DETECTOR

EAN 4007841067151

E-Nr. 535900035

Accessories

ORDERING INFORMATION	
Art.-Nr.	067151
EAN	4007841067151
E-Number	535900035
Typ	IR Micro Office 6m DALI-2 APC - concealed
nevalux nevalux AG Neugrütstrasse 2 8610 Uster +41 44 508 78 78 info@nevalux.swiss	