

RS PRO P1 flat S Neutral white

SENSOR-SWITCHED LED INDOOR LIGHT

neva
lux

EAN 4007841069674

E-Nr. 941003259

 **steinel**

272 x 64 mm



RS PRO P1 flat S Neutral white

SENSOR-SWITCHED LED INDOOR LIGHT

EAN 4007841069674
E-Nr. 941003259

Technical Data

DIMENSIONS				SETTINGS	
Dimensions Ø × H	272 x 64 mm	Mechanical scalability	No	Twilight setting	2 – 2000 lx
ELECTRICAL		Radial range	Ø 8 m (50 m²)	Time setting	5 s – 15 Min.
Mains connection	220 – 240 V / 50 – 60 Hz	Tangential range	Ø 8 m (50 m²)	Base light function	Yes
Power	9,4 W	Mounting height	2 – 4 m	Base light function time	10/30 min, all night
Fluorescent lamps ECG	400 W	Optimal mounting height	2,8 m	Main light adjustable	No
Fluorescent lamps uncompensated	400 VA	CONNECTIVITY		Base light function in percent	10 %
Fluorescent lamps series-compensated	400 VA	Networking	Yes	Base light function percent from	10 %
Fluorescent lamps parallel-compensated	400 VA	Networking via	Cable	HOUSING & MATERIAL	
Switching output 1 low-voltage halogen lamps	800 VA	LIGHTING TECHNOLOGY		Impact resistance	IK03
LED lamps < 2 W	16 W	Measured luminous flux 360°	965 lm	Protection class (IP)	IP54
LED lamps > 2 W < 8 W	64 W	Colour temperature	4000 K	Protection class	II
LED lamps > 8 W	64 W	With illuminant	Yes, STEINEL LED system	Ambient temperature	from -10 up to 40 °C
Capacitive load in µF	88 µF	Illuminant	LED cannot be replaced	Housing material	Plastic
Switching output 1 number of LED/fluorescent lamps	50 pcs.	Base	without	Cover material	Plastic, opal
SENSOR TECHNOLOGY		LED cooling system	Passive Thermo Control	Mounting location	ceiling wall
Max. mounting height	4,00 m	Soft light start	Yes	Colour	white
Sensor technology	High frequency	Continuous light	selectable, 4h	SCOPE OF DELIVERY & WARRANTY	
With motion detector	Yes	LIFETIME		Manufacturer warranty	5 years
Detection angle	360 °	LED lifetime max. °C	60000 h	CERTIFICATES & EPREL	
Electronic scalability	Yes	LED lifetime L70B50 25°C	> 60000 h	Certificates	DEKRA
		Luminous flux decline per LM80	L80B10	EPREL category	Surrounded product with integrated light source


RS PRO P1 flat S Neutral white

SENSOR-SWITCHED LED INDOOR LIGHT

EAN 4007841069674
E-Nr. 941003259

Illustrations

TECHNICAL DRAWINGS

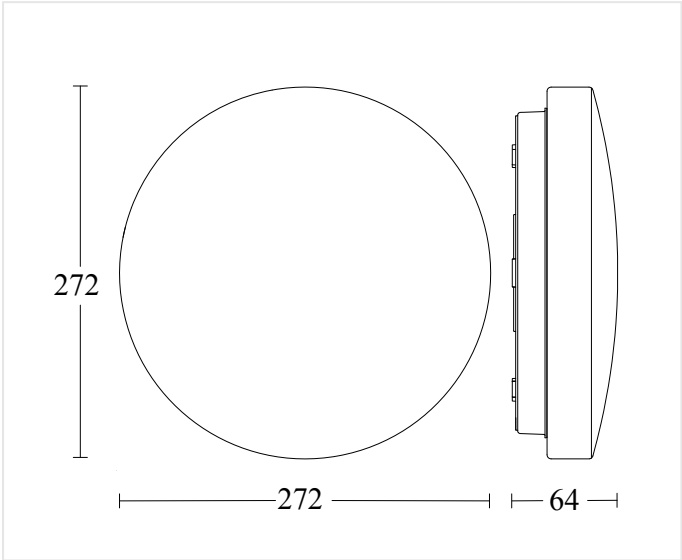

272 x 64 mm

MOUNTING HEIGHT

2 – 4 m BEREICH	2,8 m OPTIMAL	4,00 m MAX
--------------------	------------------	---------------

RS PRO P1 flat S Neutral white


SENSOR-SWITCHED LED INDOOR LIGHT

EAN 4007841069674

E-Nr. 941003259


Wiring Diagrams

WIRING DIAGRAM 1

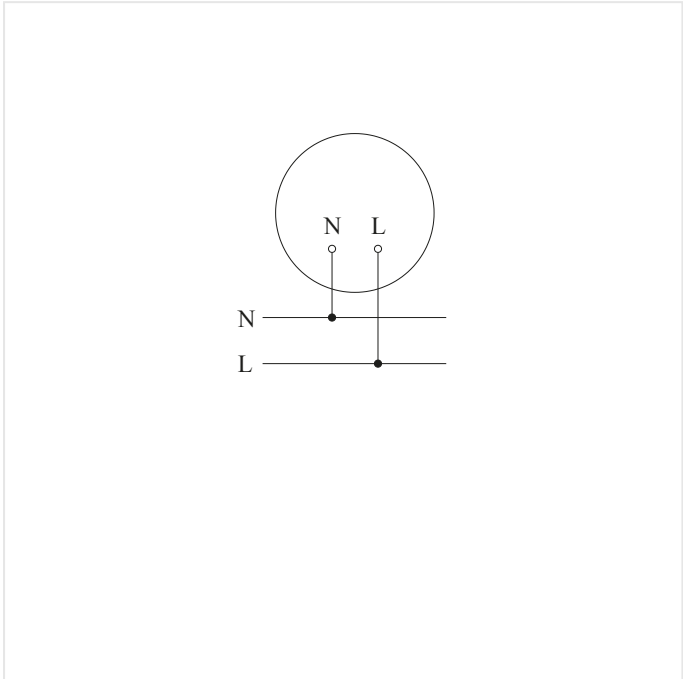

Master circuit diagram

WIRING DIAGRAM 2

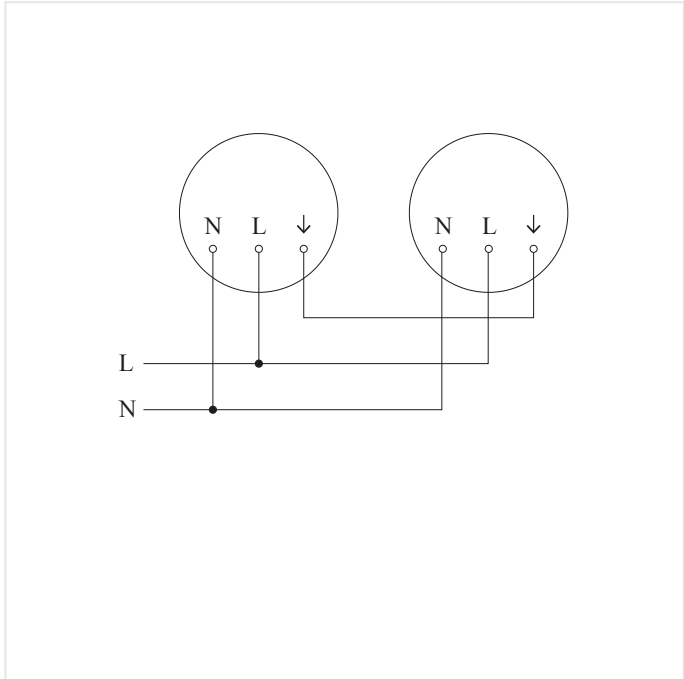

Master/master interconnection circuit diagram

RS PRO P1 flat S Neutral white

SENSOR-SWITCHED LED INDOOR LIGHT


EAN 4007841069674

E-Nr. 941003259

Highlights



Including STEINEL LED system

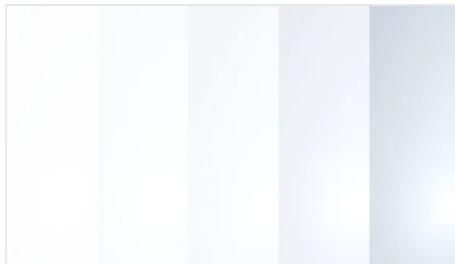

Intelligent soft light start



Interconnectable by cable (maximum of 10 units)



Optional basic lighting level 10 %

RS PRO P1 flat S Neutral white

SENSOR-SWITCHED LED INDOOR LIGHT

EAN 4007841069674
E-Nr. 941003259

Accessories

ORDERING INFORMATION	
Art.-Nr.	069674
EAN	4007841069674
E-Number	941003259
Typ	RS PRO P1 flat S Neutral white
neva lux nevalux AG Neugrütstrasse 2 8610 Uster +41 44 508 78 78 info@nevalux.swiss	