

XSolar L-S Anthracite

SOLAR LIGHT

neva
lux

EAN 4007841085698

E-Nr. 941201719

● steinel

187 x 189 x 298 mm



XSolar L-S Anthracite

SOLAR LIGHT

EAN 4007841085698

E-Nr. 941201719

Technical Data

DIMENSIONS		LIGHTING TECHNOLOGY		Settings via	Potentiometers
Dimensions L x W x H	187 x 189 x 298 mm	Measured luminous flux 360°	150 lm	Base light function in percent	3 %
ELECTRICAL		Colour temperature	3000 K	Base light function percent from	3 %
Power	1,2 W	Colour rendering index	80-89	HOUSING & MATERIAL	
Supply voltage detail	Lithium-iron-phosphate rechargeable battery 2500 mAh Solar supply, no mains power required	With illuminant	Yes, STEINEL LED system	Impact resistance	IK03
SENSOR TECHNOLOGY		Illuminant	LED cannot be replaced	Protection class (IP)	IP44
Max. mounting height	2,00 m	Base	without	Protection class	III
Sensor technology	passive infrared	LED cooling system	Passive Thermo Control	Ambient temperature	from -20 up to 40 °C
With motion detector	Yes	Soft light start	No	Housing material	Plastic
		LIFETIME		Cover material	Plastic, transparent
Detection angle	140 °	LED lifetime max. °C	50000 h	Mounting location	wall
Sneak-under protection	Yes	Luminous flux decline per LM80	L70B10	Application location	Outdoors
Segment-by-segment masking	No	SETTINGS		Mounting type	Surface wiring
Electronic scalability	No	Twilight switch	Yes	Application room	all round the building courtyard & driveway front door outdoors terrace / balcony
Mechanical scalability	No	Twilight setting	2 lx	SCOPE OF DELIVERY & WARRANTY	
Radial range	r = 2 m (5 m²)	Time setting	10 s – 1 Min.	Manufacturer warranty	5 years
Tangential range	r = 8 m (78 m²)	Base light function	Yes	Extension cable included	6 m
Mounting height	1,80 – 2,00 m	Base light function time	all night		
Optimal mounting height	1,8 m	Functions	Motions sensor		


XSolar L-S Anthracite

SOLAR LIGHT

EAN 4007841085698
E-Nr. 941201719

Illustrations

TECHNICAL DRAWINGS

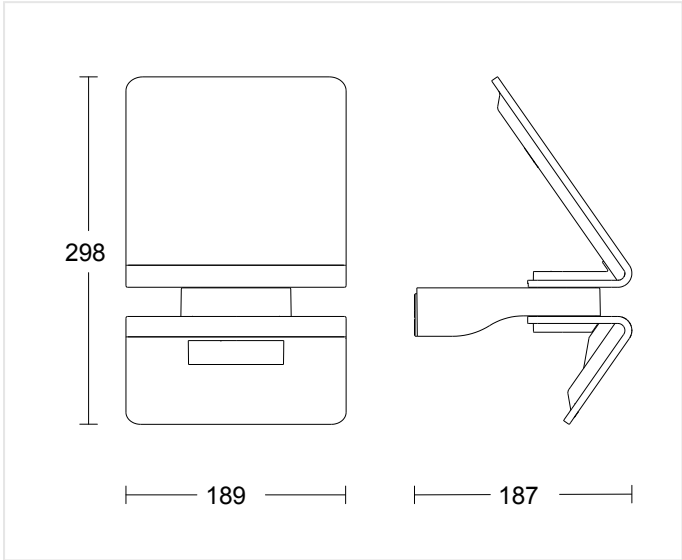

187 x 189 x 298 mm

MOUNTING HEIGHT

1,80 – 2,00 m BEREICH	1,8 m OPTIMAL	2,00 m MAX
--------------------------	------------------	---------------


XSolar L-S Anthracite

SOLAR LIGHT

EAN 4007841085698

E-Nr. 941201719

Highlights

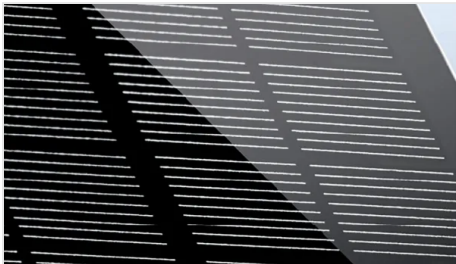

High-quality monocrystalline solar panel



Including 2500 mAh lithium iron-phosphate rechargeable battery



Including STEINEL LED system



Optional basic lighting level



Compass for setting the panel to face the optimum direction



Included 6 m extension cable

XSolar L-S Anthracite

SOLAR LIGHT

EAN 4007841085698

E-Nr. 941201719

Accessories

ORDERING INFORMATION	
Art.-Nr.	085698
EAN	4007841085698
E-Number	941201719
Typ	XSolar L-S Anthracite
neva lux nevalux AG Neugrütstrasse 2 8610 Uster +41 44 508 78 78 info@nevalux.swiss	